




Fetching a file over Garage, a simplified example




asks for a file



KEY



FILE


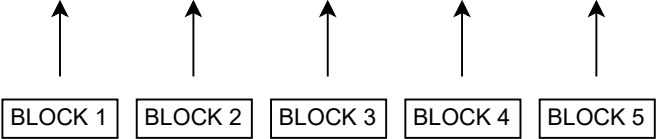


The descriptor is fetched


by hashing the key




From the descriptor, we get the list of blocks



[0x00, 0x5F]



[0x60, 0xBF]



[0xC0, 0xFF]